



**LV7239****CMOS IC****LOW POWER RAIL-TO-RAIL
INPUT COMPARATOR WITH
PUSH-PULL OUTPUT****■ DESCRIPTION**

The UTC **LV7239** is a rail-to-rail input low power comparator, characterized at supply voltage 2.7V and 5.0V. It consumes only 65 μ A supply current while achieving a 135ns propagation delay at 5V.

The UTC **LV7239** has a greater than rail-to-rail common-mode voltage range. The input common mode voltage range extends 200mV below ground and 200mV above supply, allowing both ground and supply sensing.

The UTC **LV7239** features a push-pull output stage. This feature allows operation without the need of an external pull-up resistor.

The UTC **LV7239** is available in SOT-25 and SOT-353 packages, which is ideal for systems where small size and low power is critical.

**■ FEATURES**



- * 2.7V and 5V, Single-Supply Applications
- * Rail-to-Rail Input
- * Low supply Current: 65 μ A
- * Propagation Delay: 135ns @ 5V
- * Push-Pull Output

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
LV7239L-AF5-R	LV7239G-AF5-R	SOT-25	Tape Reel
LV7239L-AF5-x-R	LV7239G-AF5-x-R	SOT-25	Tape Reel
LV7239L-AL5-R	LV7239G-AL5-R	SOT-353	Tape Reel
LV7239L-AL5-x-R	LV7239G-AL5-x-R	SOT-353	Tape Reel

LV7239G-AF5-x-R	(1) Packing Type (2) Pin Code (3) Package Type (4) Green Package	(1) R: Tape Reel (2) x: refer to PIN CONFIGURATIONS (3) AF5: SOT-25, AL5: SOT-353 (4) G: Halogen Free and Lead Free, L: Lead Free
-----------------	---	--

MARKING

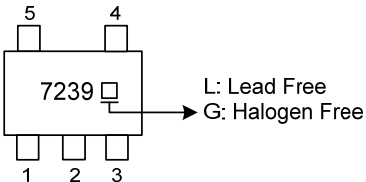LV7239	LV7239-X
 L: Lead Free G: Halogen Free	 Pin Code: A, B


PIN CONFIGURATION

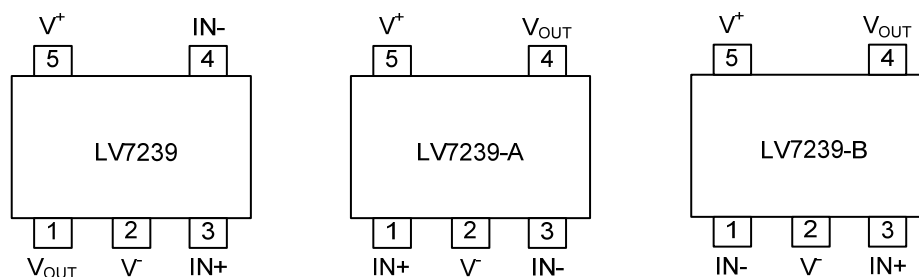

PIN DESCRIPTION

PIN NAME	DESCRIPTION
V_{OUT}	Output
V^-	Negative Supply
IN+	Non-inverting Input
IN-	Inverting Input
V^+	Positive Supply

BLOCK DIAGRAM

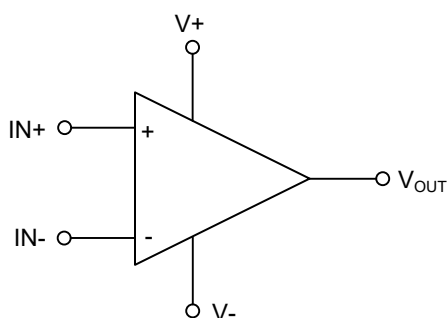

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage (V ⁺ - V ⁻)	V _S	6	V
Differential Input Voltage		± Supply Voltage	V
Output Short Circuit Duration		See (Note 2)	
SOLDERING INFORMATION			
Voltage at Input/Output Pins		(V ⁺) +0.3, (V ⁻) - 0.3	V
Current at Input Pin (Note 2)		±10	mA
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-65 ~ +150	°C

- Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of ±30mA over long term may adversely affect reliability.
3. Limiting input pin current is only necessary for input voltages that exceed absolute maximum input voltage ratings.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage (V ⁺ - V ⁻)	V _S	2.7 ~ 5.5	V
Temperature Range	T _A	-40 ~ +125	°C

■ 5V ELECTRICAL CHARACTERISTICS

(V_{CM}=V⁺/2, V⁺= 5V, V⁻= 0V, T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V _{OS}		-6	±1	+6	mV
Input Bias Current	I _B			30	400	nA
Input Offset Current	I _{OS}			5	200	nA
Common-Mode Rejection Ratio	CMRR	0V < V _{CM} < 5V	52	67		dB
Power Supply Rejection Ratio	PSRR	V ⁺ = 2.7V~5V	65	85		dB
Input Common-Mode Voltage Range	V _{CM}	CMRR > 50dB	V ⁻ - 0.1	-0.2~ 5.2	V ⁺ +0.1	V
Output Swing High	V _O	I _L =4mA, V _{ID} =500mV	V ⁺ -0.25	V ⁺ -0.15		V
		I _L =0.4mA, V _{ID} =500mV		V ⁺ -0.01		V
Output Swing Low		I _L =-4mA, V _{ID} =-500mV		230	350	mV
		I _L =-0.4mA, V _{ID} =-500mV		10		mV
Output Short Circuit Current	I _{SC}	Sourcing, V _O =0V	25	57		mA
		Sinking, V _O =5V	30	47		mA
Supply Current	I _S	No load		65	95	μA
Propagation Delay	t _{PD}	Overdrive=20mV, C _{LOAD} =100pF		150		ns
		Overdrive=50mV, C _{LOAD} =100pF		140		ns
		Overdrive=100mV, C _{LOAD} =100pF		135		ns
Propagation Delay Skew	t _{SKW}	Overdrive= 20mV (Note 1)		50		ns
Output Rise Time	t _r	10%~90%		1.2		ns
Output Fall Time	t _f	90%~10%		1.2		ns

- Notes: 1. Propagation Delay Skew is defined as the absolute value of the difference between t_{PD LH} and t_{PD HL}.
2. The circuit needs to add a 0.1μF capacitor between V⁺ and ground.

■ 2.7V ELECTRICAL CHARACTERISTICS

($V_{CM}=V^+/2$, $V^+=2.7V$, $V^-=0V$, $T_A=25^\circ C$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{OS}		-6	± 0.8	+6	mV
Input Bias Current	I_B			30	400	nA
Input Offset Current	I_{OS}			5	200	nA
Common-Mode Rejection Ratio	CMRR	$0V < V_{CM} < 2.7V$ (Note 1)	52	62		dB
Power Supply Rejection Ratio	PSRR	$V^+ = 2.7V \sim 5V$	65	85		dB
Input Common-Mode Voltage Range	V_{CM}	CMRR > 50dB	$V^- - 0.1$	-0.2~2.9	$V^+ + 0.1$	V
Output Swing High	V_O	$I_L=4mA$, $V_{ID}=500mV$	$V^+ - 0.35$	$V^+ - 0.26$		V
		$I_L=0.4mA$, $V_{ID}=500mV$		$V^+ - 0.02$		V
Output Swing Low		$I_L=-4mA$, $V_{ID}=-500mV$		230	350	mV
		$I_L=-0.4mA$, $V_{ID}=-500mV$		15		mV
Output Short Circuit Current	I_{SC}	Sourcing, $V_O=0V$		16		mA
		Sinking, $V_O=2.7V$		13.1		mA
Supply Current	I_S	No load		52	85	μA
Propagation Delay	t_{PD}	Overdrive=20mV, $C_{LOAD} = 100pF$		160		ns
		Overdrive=50mV, $C_{LOAD} = 100pF$		155		ns
		Overdrive=100mV, $C_{LOAD} = 100pF$		150		ns
Propagation Delay Skew	t_{SKEW}	Overdrive=20mV (Note 2)		55		ns
Output Rise Time	t_r	10%~90%		1.7		ns
Output Fall Time	t_f	90%~10%		1.7		ns

Notes: 1. CMRR is not linear over the common mode range. Limits are guaranteed over the worst case from 0 to $V^+/2$ or $V^+/2$ to V^+ .



2. Propagation Delay Skew is defined as the absolute value of the difference between t_{PDLH} and t_{PDHL} .

3. The circuit needs to add a 0.1 μF capacitor between V^+ and ground.

■ TYPICAL APPLICATION CIRCUIT

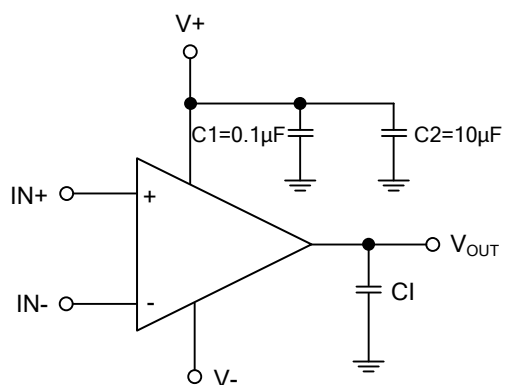

■ TYPICAL CHARACTERISTICS

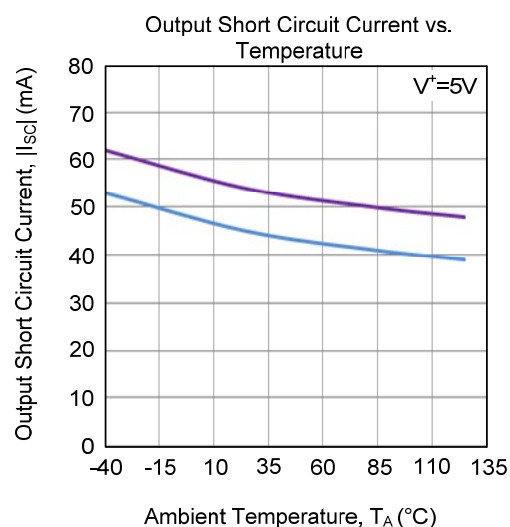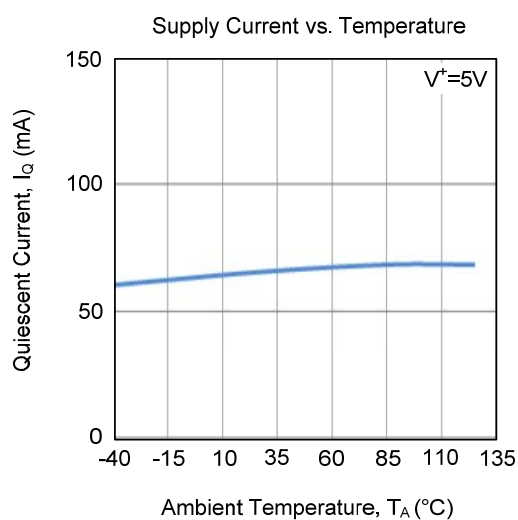

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.