



U74HC74

CMOS IC

DUAL D FLIP-FLOP WITH SET AND RESET, POSITIVE-EDGE TRIGGER

DESCRIPTION


The **U74HC74** contains dual D flip-flops and each flip-flop has independent DATA, $\overline{\text{SET}}$, $\overline{\text{RESET}}$ and clock inputs and complementary outputs Q and $\overline{\text{Q}}$. A low level at appropriate input helps $\overline{\text{SET}}$ and $\overline{\text{RESET}}$ adjust the output. Data will be transferred to the output during the low-to-high transition of the CLK while $\overline{\text{SET}}$ and $\overline{\text{RESET}}$ are high.

FEATURES



- * Operation Voltage Range: 2 ~ 6V
- * Buffered Inputs
- * Asynchronous Set and Reset
- * Complementary Outputs
- * High Noise Immunity


ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HC74L-D14-T	U74HC74G-D14-T	DIP-14	Tube
U74HC74L-S14-R	U74HC74G-S14-R	SOP-14	Tape Reel
U74HC74L-UEA-R	U74HC74G-UEA-R	SOP-14U	Tape Reel
U74HC74L-P14-R	U74HC74G-P14-R	TSSOP-14	Tape Reel
U74HC74L-UEB-R	U74HC74G-UEB-R	TSSOP-14U	Tape Reel


 U74HC74G-D14-T (1) Packing Type (2) Package Type (3) Green Package	(1) T: Tube, R: Tape Reel (2) D14: DIP-14, S14: SOP-14, UEA: SOP-14 P14: TSSOP-14, UEB: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
--	---

MARKING

DIP-14	SOP-14 / SOP-14U / TSSOP-14 / TSSOP-14U
 UTC □□□□ → Date Code L: Lead Free U74HC74 □ → G: Halogen Free □□ → Lot Code	 UTC □□□□ → Date Code L: Lead Free U74HC74 □ → G: Halogen Free □□ → Lot Code

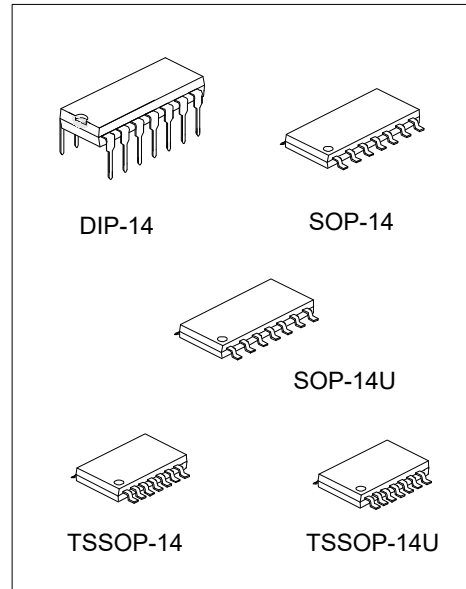

PIN CONFIGURATION

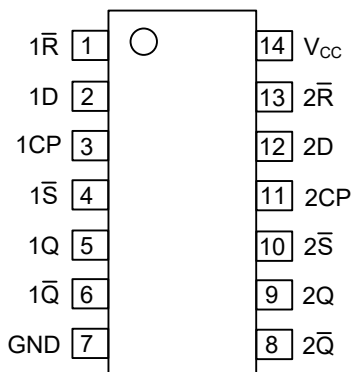


FUNCTION TABLE (each gate)

INPUT			OUTPUT		
SET	RESET	CP	D	Q	Q
L	H	x	x	H	L
H	L	x	x	L	H
H	H	↑	H	H	L
H	H	↑	L	L	H
H	H	L	x	Q0	Q0
L	L	x	x	H (note)	H (note)


Note: Unstable state, it will not persist when set and reset inputs return to their inactive level.

FUNCTIONAL DIAGRAM

Logic Diagram

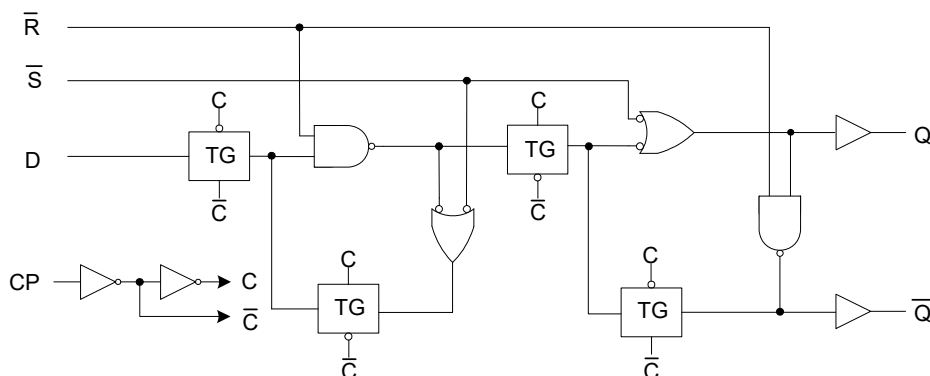

IEC logic symbol

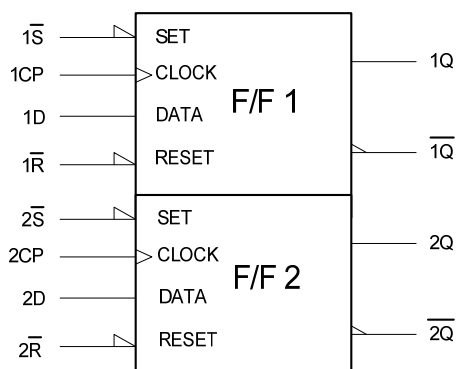

■ ABSOLUTE MAXIMUM RATING (Unless otherwise specified)(Note)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ +7	V
Input Voltage	V_{IN}	0 ~ V_{CC}	V
Output Voltage	V_{OUT}	0 ~ V_{CC}	V
Input Clamp Current	I_{IK}	±20	mA
Output Clamp Current	I_{OK}	±20	mA
Output Current	I_{OUT}	±25	mA
V_{CC} or GND Current	I_{CC}	±50	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	2		6	V
Input Voltage	V_{IN}	0		V_{CC}	V
Output Voltage	V_{OUT}	0		V_{CC}	V
Input Transition Rise or Fall Rate	$V_{CC}=2V$	t_R, t_F		1000	ns
	$V_{CC}=4.5V$			500	ns
	$V_{CC}=6V$			400	ns
Operating Temperature	T_A	-40		+125	°C

■ STATIC CHARACTERISTICS (Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^{\circ}C$			$T_A=-40\sim+125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
High-Level Input Voltage	V_{IH}	$V_{CC}=2.0V$	1.5			1.5			V
		$V_{CC}=4.5V$	3.15			3.15			V
		$V_{CC}=6.0V$	4.2			4.2			V
Low-Level Input Voltage	V_{IL}	$V_{CC}=2.0V$			0.5			0.5	V
		$V_{CC}=4.5V$			1.35			1.35	V
		$V_{CC}=6.0V$			1.8			1.8	V
High-Level Output Voltage	V_{OH}	$V_{CC}=2.0V, I_{OH}=-20\mu A$	1.9			1.62			V
		$V_{CC}=4.5V, I_{OH}=-20\mu A$	4.4			4.12			V
		$V_{CC}=6.0V, I_{OH}=-20\mu A$	5.9			5.72			V
		$V_{CC}=4.5V, I_{OH}=-4mA$	3.98			3.7			V
		$V_{CC}=6V, I_{OH}=-5.2mA$	5.48			5.2			V
Low-Level Output Voltage	V_{OL}	$V_{CC}=2.0V, I_{OL}=20\mu A$			0.1			0.14	V
		$V_{CC}=4.5V, I_{OL}=20\mu A$			0.1			0.14	V
		$V_{CC}=6.0V, I_{OL}=20\mu A$			0.1			0.14	V
		$V_{CC}=4.5, I_{OL}=4mA$			0.26			0.33	V
		$V_{CC}=6, I_{OL}=5.2mA$			0.26			0.33	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=6.0V, V_{IN}=V_{CC}$ or GND			±0.1			±0.1	μA
Quiescent Supply Current	I_Q	$V_{CC}=6.0V, V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$			4			40	μA


■ DYNAMIC CHARACTERISTICS (Input: $t_R, t_F=6\text{ns}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^\circ\text{C}$			$T_A=-40\sim+125^\circ\text{C}$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation delay from input (CP) to output($Q, \bar{Q}$)	t_{PLH}/t_{PHL}	$V_{CC}=2.0\text{V}, C_L=50\text{pF}$			175			265	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$			35			53	ns
		$V_{CC}=6.0\text{V}, C_L=50\text{pF}$			30			45	ns
Propagation delay from input ($\bar{R}, \bar{S}$) to output ($Q, \bar{Q}$)	t_{PLH}/t_{PHL}	$V_{CC}=2.0\text{V}, C_L=50\text{pF}$			200			300	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$			40			60	ns
		$V_{CC}=6.0\text{V}, C_L=50\text{pF}$			34			51	ns
Output Transition Time	t_{TLH}/t_{THL}	$V_{CC}=2.0\text{V}, C_L=50\text{pF}$			75			110	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$			15			22	ns
		$V_{CC}=6.0\text{V}, C_L=50\text{pF}$			13			19	ns
CP frequency	f_{MAX}	$V_{CC}=5\text{V}, C_L=15\text{pF}$		50			50		MHZ


■ OPERATING CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Capacitance	C_{IN}	$V_{CC}=6.0\text{V}, V_{IN}=V_{CC}$ or GND			10	pF
Power Dissipation Capacitance	C_{PD}	No load		25		pF

■ TEST CIRCUIT AND WAVEFORMS

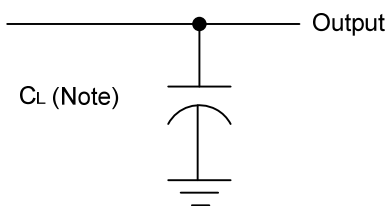

Note: C_L includes probe and jig capacitance.

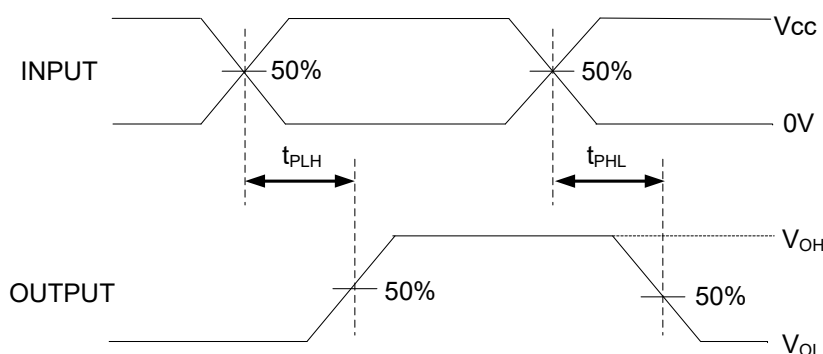

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.