


**UK4N20****Power MOSFET****4A, 200V N-CHANNEL
POWER MOSFET****DESCRIPTION**

The UTC **UK4N20** is a N-channel mode power MOSFET using UTC's advanced technology to provide customers with a minimum on-state resistance, low gate charge and superior switching performance.

FEATURES

- * $R_{DS(ON)} \leq 1.05\Omega$ @ $V_{GS}=10V$, $I_D=1.8A$
- * High switching speed
- * Typically 3.2nC low gate charge
- * 100% avalanche tested

SYMBOL**ORDERING INFORMATION**


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UK4N20L-AA3-R	UK4N20G-AA3-R	SOT-223	G	D	S	Tape Reel
UK4N20L-TN3-R	UK4N20G-TN3-R	TO-252	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UK4N20G-AA3-R (1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) AA3: SOT-223, TN3: TO-252 (3) G: Halogen Free and Lead Free, L: Lead Free
--	---

MARKING

SOT-223	TO-252
UK4N20 L: Lead Free G: Halogen Free Date Code 1	UTC UK4N20 L: Lead Free G: Halogen Free Date Code Lot Code 1

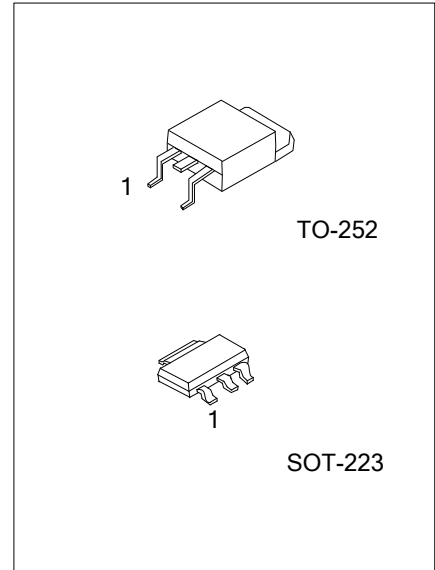

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C ,unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V _{DSS}	200	V
Gate-Source Voltage		V _{GSS}	±20	V
Continuous Drain Current	Continuous	I _D	4	A
	Pulsed	I _{DM}	8	A
Avalanche Energy	Single Pulsed (Note 3)	E _{AS}	90	mJ
Power Dissipation	SOT-223	P _D	0.8	W
	TO-252		60	W
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. L=10mH, I_{AS}=4.24A, V_{DD}=50V, R_G=25 Ω, Starting T_J = 25°C

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ _{JA}	110	°C/W
Junction to Case	θ _{JC}	2.08	°C/W


■ ELECTRICAL CHARACTERISTICS

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	200			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =200V			10	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			100	nA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	I _D =250μA	1.0		2.0	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =1.8A			1.05	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1MHz		206		pF
Output Capacitance		C _{OSS}			40		pF
Reverse Transfer Capacitance		C _{RSS}			6.6		pF
SWITCHING PARAMETERS							
Total Gate Charge (Note 1)		Q _G	V _{DS} =100V, V _{GS} =10V, I _D =2A, I _G =1mA		7.6		nC
Gate to Source Charge		Q _{GS}			2.4		nC
Gate to Drain Charge		Q _{GD}			0.6		nC
Turn-ON Delay Time (Note 1)		t _{D(ON)}	V _{DD} =100V, V _{GS} =10V, I _D =4A, R _G =25Ω		2		ns
Rise Time		t _R			17		ns
Turn-OFF Delay Time		t _{D(OFF)}			27		ns
Fall-Time		t _F			21		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Continuous Drain-Source Diode Forward Current		I _S				4	A
Maximum Pulsed Drain-Source Diode Forward Current		I _{SM}				8	A
Drain-Source Diode Forward Voltage (Note 1)		V _{SD}	I _S =4.0A			1.4	V
Body Diode Reverse Recovery Time (Note 1)		t _{rr}	I _S =4.0A, V _{GS} =0V,		128		ns
Body Diode Reverse Recovery Charge		Q _{rr}	dI _F /dt = 100A/μs		423		nC


Notes: 1. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

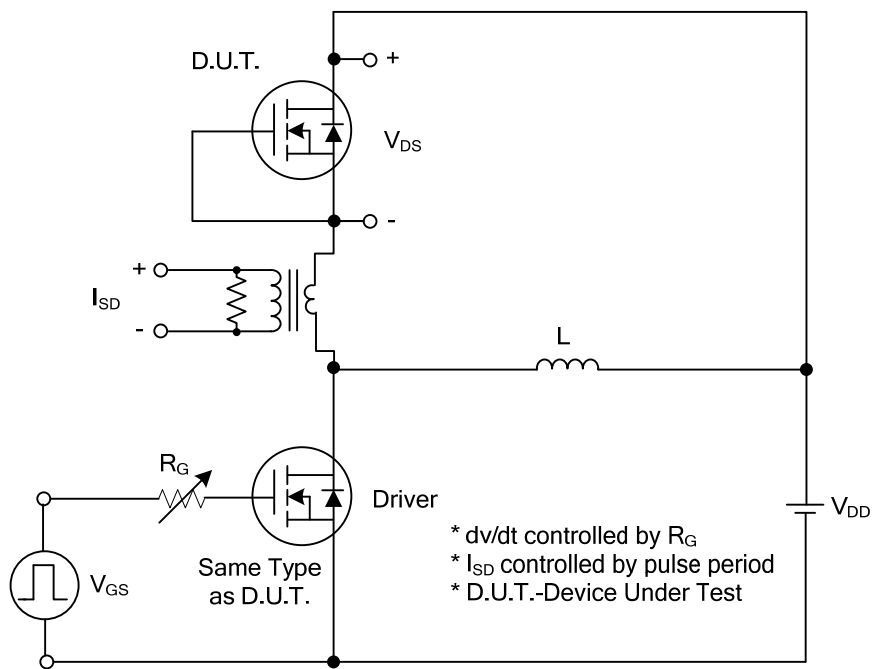


Peak Diode Recovery dv/dt Test Circuit

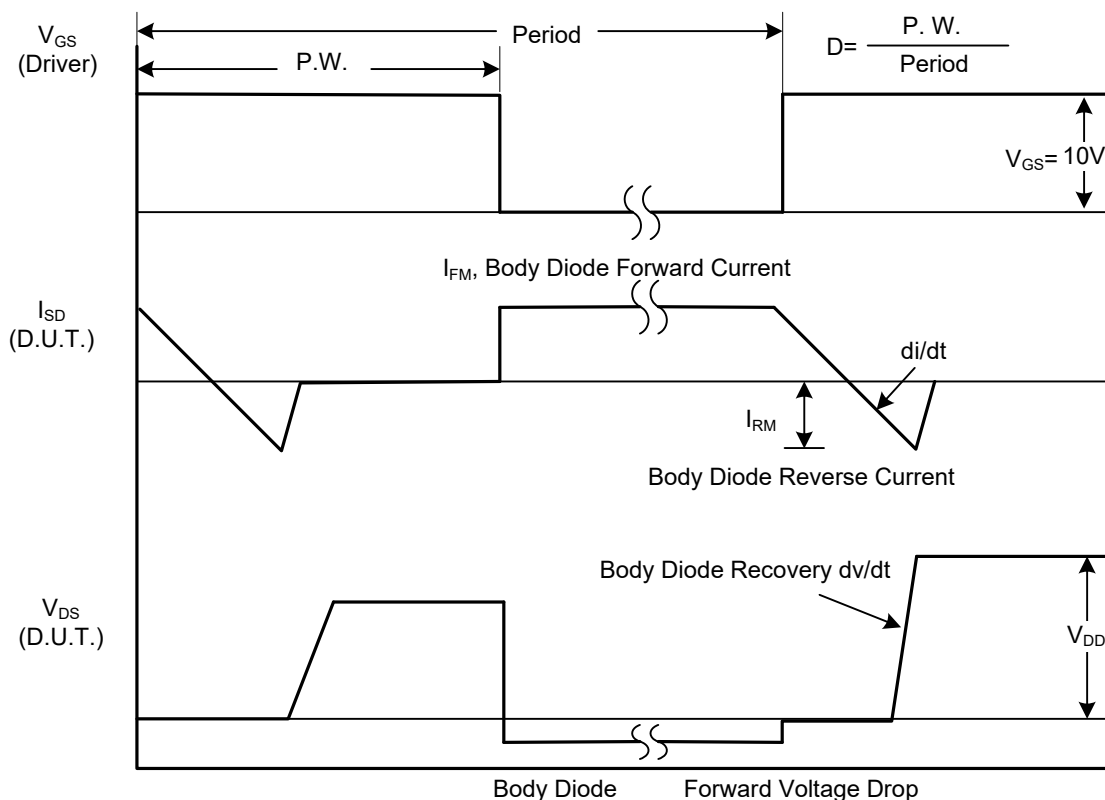


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS (Cont.)

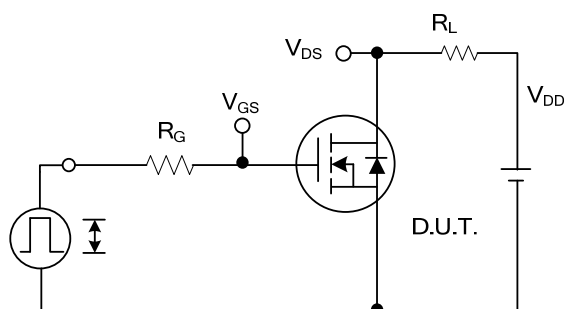


Switching Test Circuit

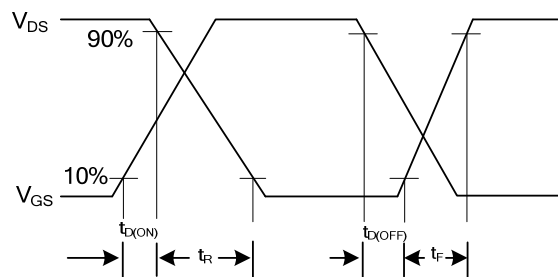


Switching Waveforms

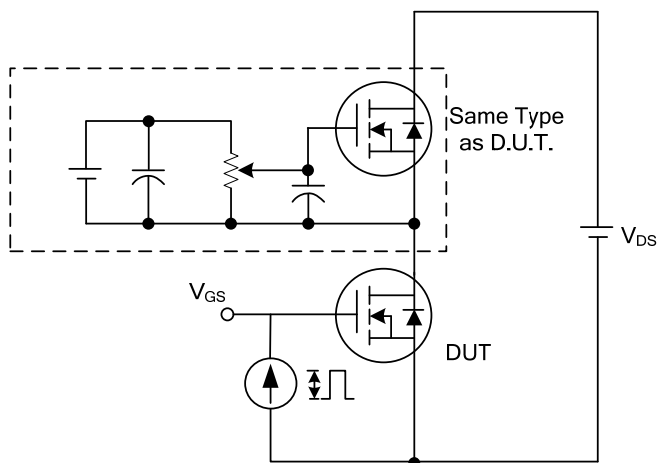


Gate Charge Test Circuit

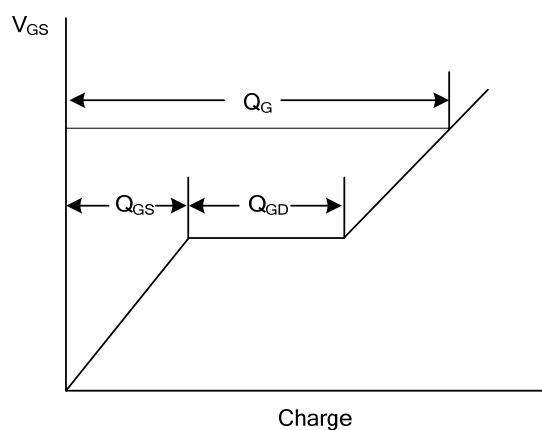

Gate Charge Waveform






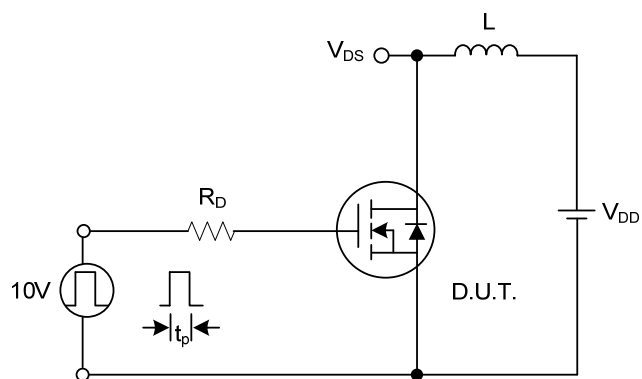


Unclamped Inductive Switching Test Circuit






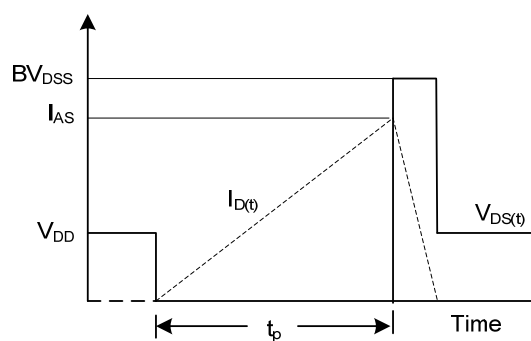


Unclamped Inductive Switching Waveforms


■ TYPICAL CHARACTERISTICS

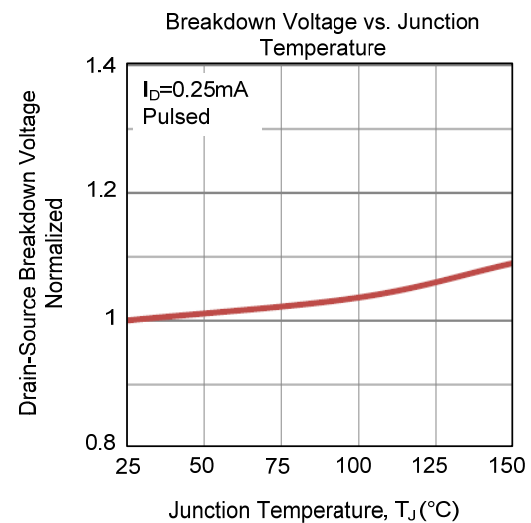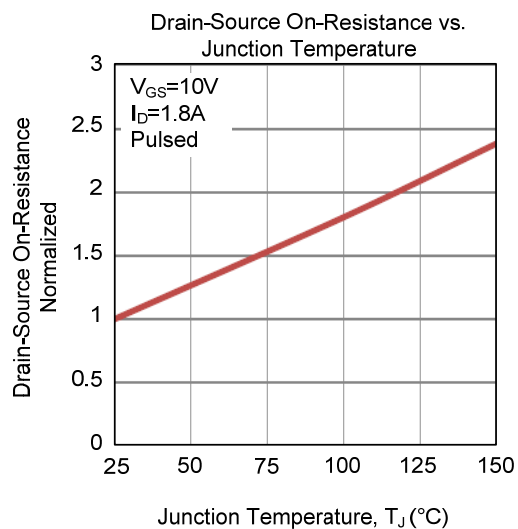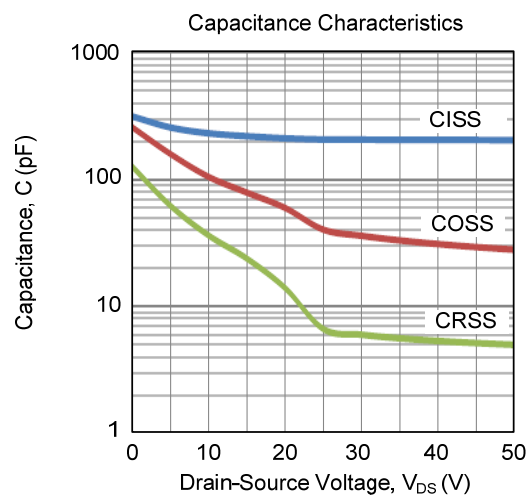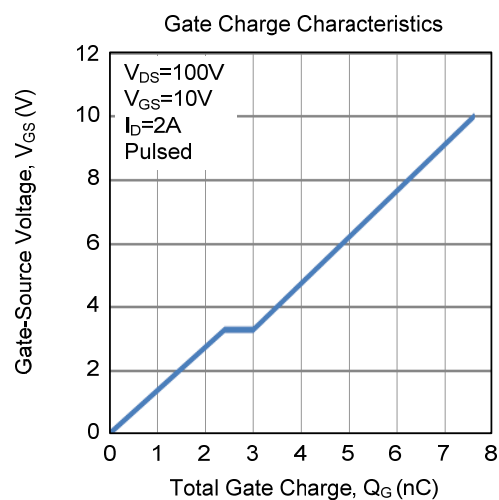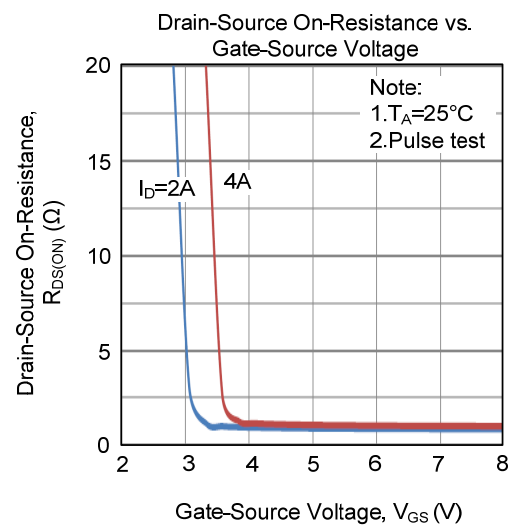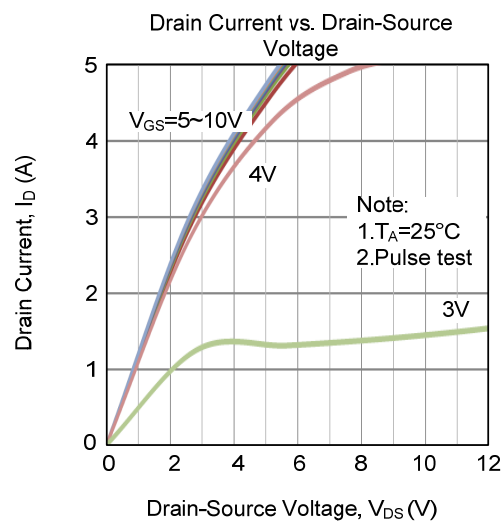

TYPICAL CHARACTERISTICS (Cont.)

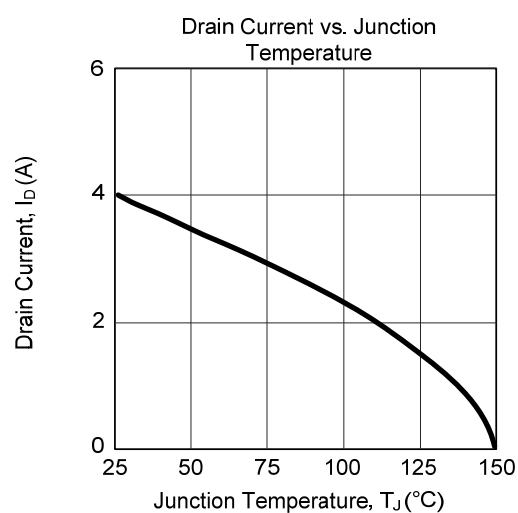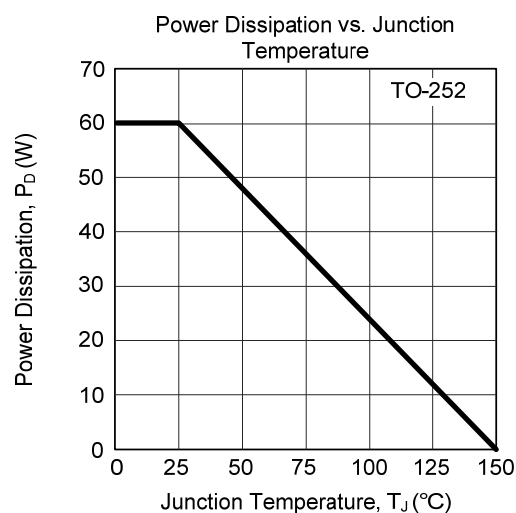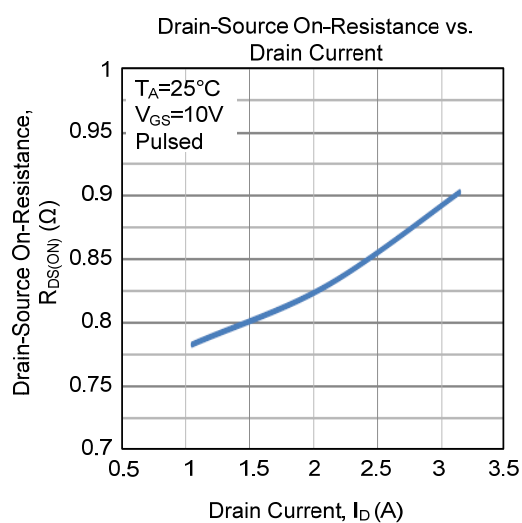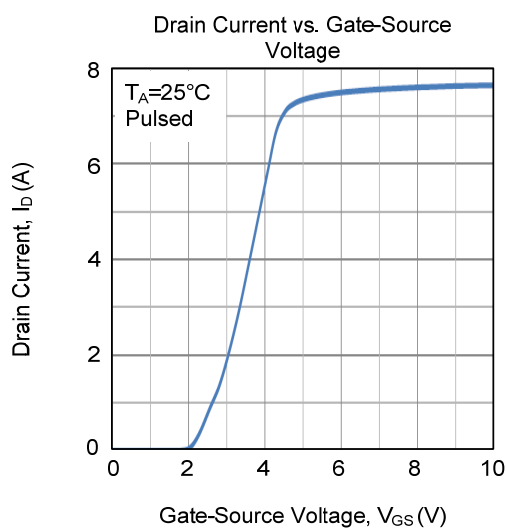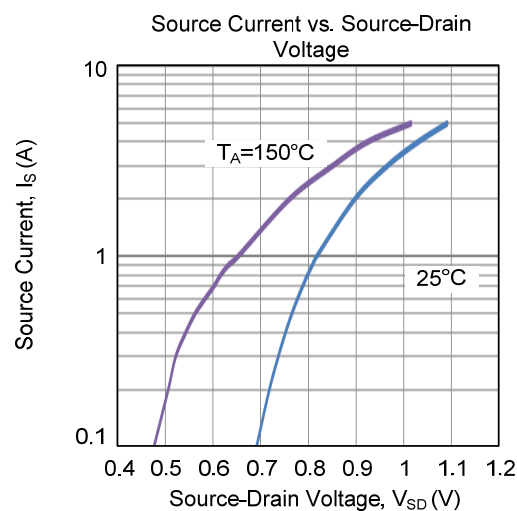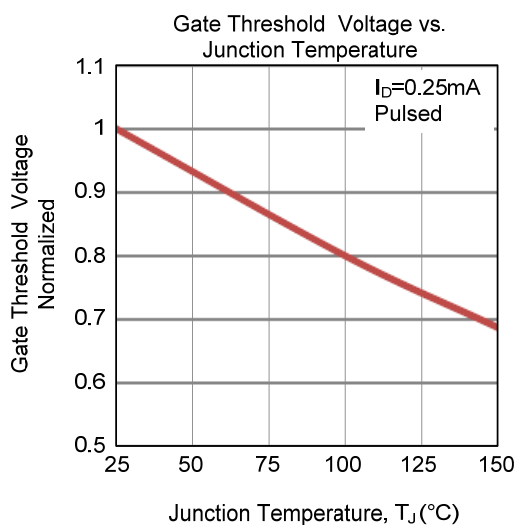

■ TYPICAL CHARACTERISTICS (Cont.)

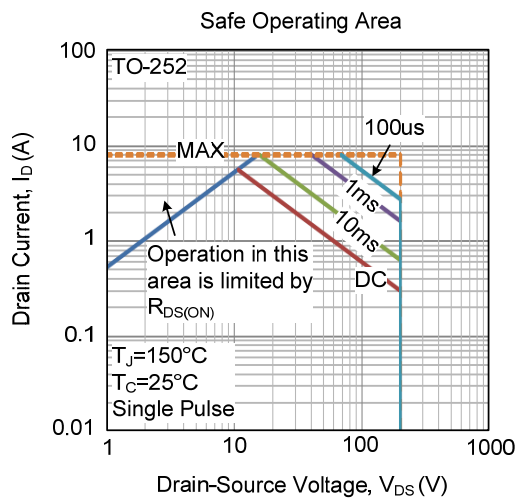

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.